


Trimline CC75 Cartridge Filter

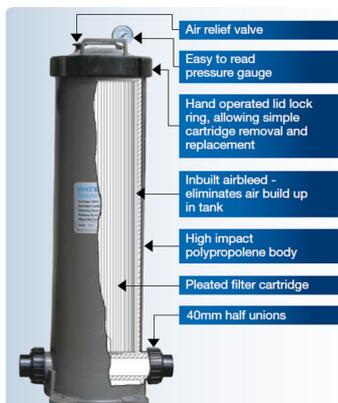

75ft² CARTRIDGE FILTER, BRAND NEW, WORLD RENOWNED Good for replacement if your CASE, LID OR LOCK RING has cracked, No back wash required, no problem valves, lower price alternative Excellent for spas, filtering oils and Ok for hot spa temperatures Has NEW cartridge inside, includes 1/2 unions, "O" rings, air release and pressure gauge 280 L/MIN FLOW RATE MAX. 720mm high, 300 x 300 Call Bob for shop sales 0243690299 just \$319 POST IF REQUIRED, OR PICK UP AT KINCUMBER Trimline cartridge filters are compact, economical filters designed to effectively filter out suspended solids from your pool.

Rating: Not Rated Yet

Price

Price with discount \$344,00

Sales price \$344,00

Sales price without tax \$456,50

Discount -\$112,50

48 h
★★★★★

[Ask a question about this product](#)

Manufacturer [Alternatives](#)

Description

75 CARTRIDGE FILTER, BRAND NEW, WORLD RENOWNED

Good for replacement if your CASE, LID OR LOCK RING has cracked, no plumbing required since 2001

No back wash required, no problem valves, lower price alternative, no media

needed

Excellent for spas, filtering oils and Ok for hot spa temperatures

Has NEW cartridge inside, includes 1/2 unions, "O" rings, air release and pressure gauge

280 L/MIN FLOW RATE MAX. 720mm high, 300 x 300

Call Bob for shop sales 0243690299

POST IF REQUIRED, OR PICK UP AT KINCUMBER

Trimline cartridge filters are compact, economical filters designed to effectively filter out suspended solids from your pool.



Trimline cartridge filters utilise a specially treated synthetic fabric which is pleated into a cartridge. Cartridge filters are ideal for applications where backwashing may not be practical.

Rugged Construction

Constructed from high impact polypropylene and designed for easy maintenance, Trimline cartridge filters will give years of trouble free service.

Trimline Pleated Filter Cartridge

The Trimline pleated filter cartridges are fabricated from pleated reusable polyester fabric. The media has been pleated to provide 4.6 to 9.3 square metres of surface area in order to maximise the cartridge dirt holding capacity and extend the time between cleaning.

Material: *Polyester Fabric material, Vinyl Plastisol end caps and a Polypropylene*

core

Operating Temperature: 4oC to 50oC

Maximum Pressure Drop: 20 kPa

Simple Maintenance: The filter cartridge is easily cleaned by hosing the pleats with a standard garden hose

Union Coupling: new smaller style lock nut for 40mm pressure pipe (2001 ON)

Warranty

is proud to show its absolute confidence in its range of Trimline cartridge filters by offering a 10 (5+5) tank warranty and 1 year warranty on all other components. Commercial applications attract a 1 year tank warranty.

Units in box: 1

Reviews

There are yet no reviews for this product.